

BASIC

The all-road paint



BASIC

Quick dry alkyd enamel spray paint with a high resistance outdoors and an excellent adherence on a large range of materials.

APPLICATIONS:

Recommended to decorate and protect any kind of support: wood, metallic surfaces cardboard, stone, etc. Ideal for DIY.

TECHNICAL CHARACTERISTICS:

Spreading 270/200ml = 1 m². 520/400ml = 2 m²
Drying time in 2 hours, total 4 hours.
Repainted after 1 hour or after 5 days.
Heat resistant: recommended up to 90°C.

HOW TO APPLY:

The surface to be painted must be clean, dry and free of any contaminants. Shake the can vigorously during 1 minute after the mixing balls sound (except the gloss varnish, which does not contain them).

Spray from a distance of 25/30 cm, applying thin and quick layers, first horizontally and then vertically. It is advisable to spray two thin layers instead of one thick layer in order to obtain uniform coverage and avoid paint sags. Once the operation is completed reverse the can and push the nozzle until only gas comes out in order to prevent nozzle clogging.

TIPS:

To achieve a perfect finish treat the surface with a primer, sealing layer or appropriate anchor layer. On painted surfaces, if properly adhered proceed with a light sanding to facilitate adherence, and if poorly adhered, remove it. To facilitate cleaning of the surface of paint residues, we recommend using the Tech Paint stripper.

GLOSS FINISH




BASIC


MATTE FINISH



SATIN FINISH

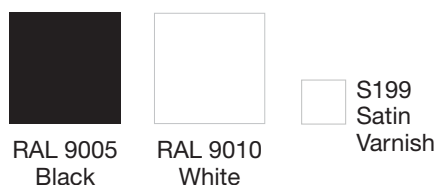


FLUORESCENT

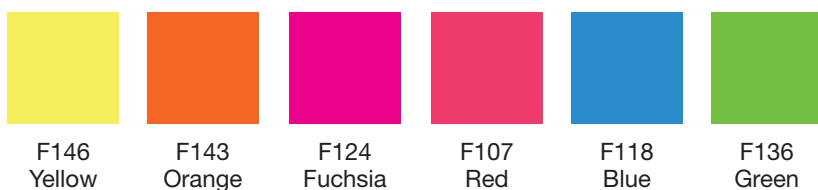

TECHNICAL CHARACTERISTICS:

Spreading 270/200ml = 0,5 m²
Spreading 520cc/400ml = 1,0 m²
Superficial dry in 5 minutes.
Total drying in 15 minutes.
Repainted in 15 minutes.

METALLIC EFFECT

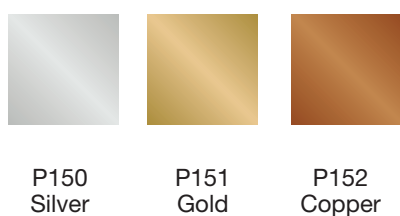

TECHNICAL CHARACTERISTICS:

Spreading 270/200ml = 0,6 m². 520/400ml = 1,2 m²
Superficial dry in 5 minutes.
Total drying in 10 minutes.
Repainted after 5 minutes.


NOZZLES:

A stroke for each need.

Ref.1: Nozzle for wide strokes.

Ref.2: Nozzle for normal strokes.

Ref.3: Nozzle for thin strokes.

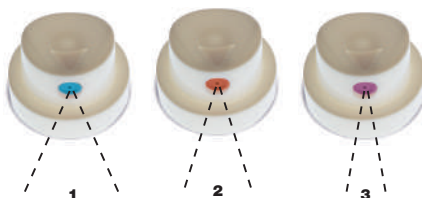

*Do not use on devices connected to the electrical network and apply in ventilated areas.
Once empty, the spray must be deposited in the yellow container.*





NOVASOL SPRAY S.A.

C/ Empalme, 27
43712 Llorenç del Penedès (SPAIN)
Tel. +34 977 677 305
www.pintyplus.com
novasol@novasolspray.com

