

EVOLUTION WATER-BASED

ACRYLIC RAL **EVOLUTION** PINTY PLUS

Water-based acrylic spray paint



EVOLUTION WATER-BASED

Water-based acrylic spray paint for domestic and professional applications.
Glossy RAL colors. Free of aggressive solvents. Low odor. Recommended for all surfaces.

Two of its main characteristics are the versatility (it can be applied on any material and in a wide range of projects) and the ease of use (no experience needed). In addition, it offers great resistance and adherence, protecting painted objects effectively. Besides the paint, the water-based family consists of two varnishes (gloss/matte) and a primer.

Pintyplus Evolution Water-Based paint is suitable for painting toys, as certified by EN 71 – 3:2019 + A1:2021 “Toy Safety” and ASTM F963 – 17 “Standard Consumer Safety Specification on Toy Safety”.

APPLICATIONS:

Ideal for any surface. Being water-based, it will not damage delicate materials as it does not contain any solvent. Ideal for jobs in industrial processes. RAL standard colors for common applications and usual repairs at home. Ideal also in the professional field. It can be used both indoors and outdoors ensuring a great protection in the two environments.

HOW TO APPLY:

The surface to be painted must be clean, dry and free of any contaminants. Shake the can vigorously during 1 minute after the mixing balls sound (except the gloss varnish, which does not contain them). Spray from a distance of 30cm, applying thin and quick layers, first horizontally and then vertically. It is advisable to spray two thin layers instead of one thick layer to obtain uniform coverage and avoid paint sags. Once the operation is completed, reverse the can and push the nozzle until only gas comes out in order to avoid nozzle clogging.

TECHNICAL CHARACTERISTICS:

Size 520/400ml.
Spreading 2 m²
Dust dry in 15 min.
Touch dry in 1h.
Total dry in 4h.
Repainted after 15min.
Heat resistance 90 °C

TIPS:

Before applying the paint and in order to achieve an optimal anchoring, it is recommended to apply a previous layer of Evolution Water-Based primer, either if the surface is smooth, slightly porous or very porous.

On a previously painted surfaces and before applying a new layer of paint, we recommend a light sanding to ease the bonding to the surface. If needed, remove entirely the anterior layer of paint. Proceed with a harder sanding or use a stripping product such as our Pintyplus Tech Paint Stripper.

GLOSS FINISH

| | | | | | | | | |
|---|---|---|---|--|---|---|---|---|
| |  |  |  |  |  |  |  | |
| | RAL 1014 Ivory | RAL 1015 Light ivory | RAL 1021 Sunny yellow | RAL 1028 Melon yellow | RAL 2004 Pure orange | RAL 3000 Flamed red | RAL 3001 Signal red | |
|  |  |  |  |  |  |  |  |  |
| RAL 3020 Traffic red | RAL 4001 Red lilac | RAL 4010 Telemagenta | RAL 5002 Ultramarine blue | RAL 5003 Sapphire blue | RAL 5010 Gentian blue | RAL 5015 Sky blue | RAL 5017 Traffic blue | RAL 6002 Leaf green |
|  |  |  |  |  |  |  |  |  |
| RAL 6005 Moss green | RAL 6009 Fir green | RAL 6018 Yellow green | RAL 6029 Mint green | RAL 7001 Silver grey | RAL 7011 Iron grey | RAL 7012 Basalt grey | RAL 7016 Anthracite grey | RAL 7035 Light grey |
|  |  |  |  |  |  |  |  |  |
| RAL 8011 Nut brown | RAL 8017 Chocolate brown | RAL 8019 Grey brown | RAL 9005 Jet black | RAL 9006 White aluminium | RAL 9010 Pure white | RAL 9016 Traffic white | RAL 9017 Traffic Black | B199 Gloss varnish |

EVOLUTION WATER-BASED

MATTE FINISH



METALLIC PAINT



PRIMER

Water-based primer that ensures a perfect adherence, a smooth finish and a high resistance. Free of aggressive solvents. Very low odor.

APPLICATIONS:

Ideal for priming any surface, including those more delicate which do not support the action of corrosive solvents. It is used to cover the pore on very porous surfaces and achieving a good anchoring on those without pore.

It maximizes the most important features of the paint: anchoring, adhesion, resistance, protection, smooth finish and ease of use. It is highly recommended to use it on any surface before painting with Pintyplus Evolution Water-based.

TECHNICAL CHARACTERISTICS:

Spreading 520/400ml: 2m²

Finish: Matte

Superficial dry in 15 min.

Total dry in 1h.

Repainted after 1h.

Shelf life: 10 years

HOW TO APPLY:

The surface to be primed must be clean, dry and free of any contaminants.

Shake the can vigorously during 1 minute after the mixing balls sound. Spray from a distance of 25/30cm, applying thin and quick layers, first horizontally and then vertically. It is advisable to apply thin layers in order to obtain uniform coverage and avoid paint sags. Once the operation is completed, reverse the can and push the nozzle until only gas comes out in order to avoid nozzle clogging.


TIPS:

It is essential to wait for the primer to dry well before applying the paint. On ideal surfaces and in regular weather conditions, apply the paint one hour after applying the primer. In wet or cold conditions, it is advisable to wait longer.

Do not use on devices connected to the current and apply in ventilated areas. Once empty, the can should be deposited in the yellow container.



IW101

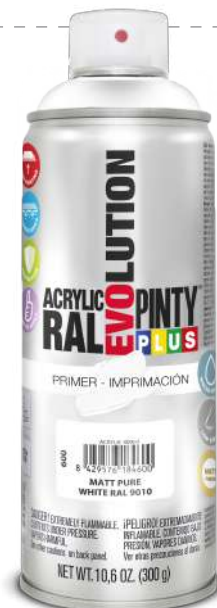

Do not use on devices connected to the current and apply in ventilated areas.
Once empty, the can should be deposited in the yellow container.





NOVASOL SPRAY S.A.

C/ Empalme, 27
43712 Llorenç del Penedès (SPAIN)
Tel. +34 977 677 305
www.pintyplus.com
novasol@novasolspray.com

