


EVOLUTION

ACRYLIC
RAL **EVOLUTION** PINTY®
PLUS

Extra-quick drying RAL acrylic paint

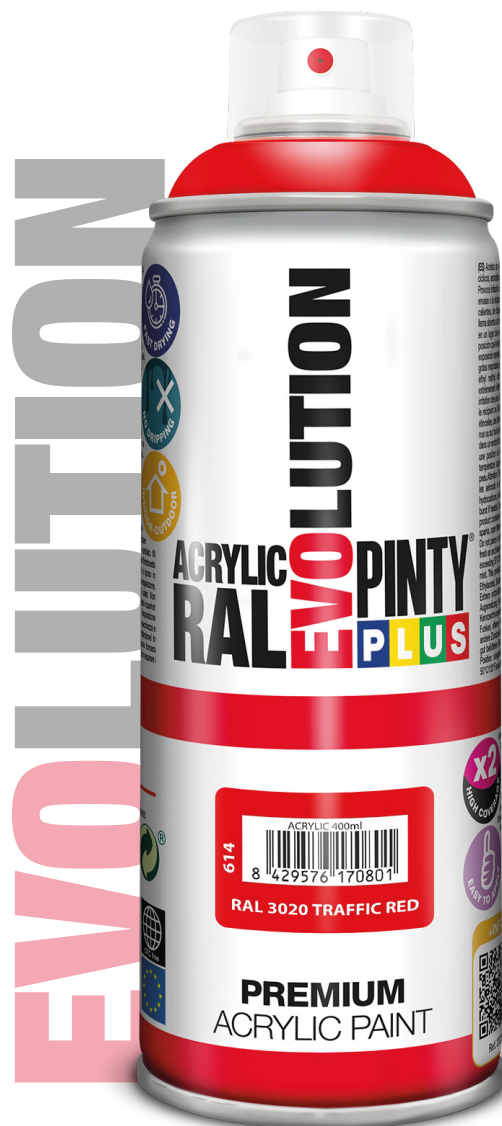

EVOLUTION

Suitable for use both indoors and outdoors.
Intense and solid colors

It provides an excellent protection and a smooth uniform finish. It adheres perfectly on any kind of support: wood, metal, stone, paper, cardboard and some plastics.

APPLICATIONS:

Ideal for painting surfaces that require fast drying for their operation. RAL standard colors.

Suitable for coding of pipes, retouching or painting supports in industrial and nautical equipments, useful in household, automobile, etc.

TECHNICAL CHARACTERISTICS:

Spreading 270/200ml = 1 m². 520/400ml = 2 m²

Total drying time in 15 minutes.

Repainted after 5 minutes.

Heat resistant paint: recommended up to 100°C.

HOW TO APPLY:

The surface to be painted must be clean, dry and free of any contaminants. Shake the can vigorously during 1 minute after the mixing balls sound (except the gloss varnish, which does not contain it). Spray from a distance of 25/30 cm, applying thin and quick layers, first horizontally and then vertically. It is advisable to spray two thin layers instead of one thick layer in order to obtain uniform coverage and avoid paint sags. Once the operation is completed reverse the can and push the nozzle until only gas comes out in order to prevent nozzle clogging.

TIPS:

To achieve a perfect finish treat the surface with a primer, sealing layer or appropriate anchor layer. On painted surfaces, if properly adhered proceed with a light sanding to facilitate adherence, and if poorly adhered, remove it. To facilitate cleaning of the surface of paint residues, we recommend using the Pintyplus Tech Paint Stripper.




GLOSS FINISH

								
	RAL 1001 Beige	RAL 1003 Signal yellow	RAL 1007 Daffodil yellow	RAL 1014 Ivory	RAL 1015 Light ivory	RAL 1018 Zinc yellow	RAL 1021 Sunny yellow	
								
RAL 1023 Traffic yellow	RAL 1028 Melon yellow	RAL 2002 Vermilion	RAL 2003 Pastel orange	RAL 2004 Pure orange	RAL 2008 Bright red orange	RAL 3000 Flame red	RAL 3001 Signal red	RAL 3002 Carmine red
								
RAL 3003 Ruby red	RAL 3005 Wine red	RAL 3009 Oxide red	RAL 3014 Antique pink	RAL 3020 Traffic red	RAL 4001 Red lilac	RAL 4006 Traffic purple	RAL 4010 Tele- magenta	RAL 5002 Ultramarine blue
								
RAL 5003 Sapphire blue	RAL 5005 Signal blue	RAL 5010 Gentian blue	RAL 5012 Light blue	RAL 5015 Sky blue	RAL 5017 Traffic blue	RAL 5021 Water blue	RAL 5023 Distant blue	RAL 5024 Pastel blue
								
RAL 6001 Emerald green	RAL 6002 Leaf green	RAL 6005 Moss green	RAL 6009 Fir green	RAL 6010 Grass green	RAL 6011 Reseda green	RAL 6017 May green	RAL 6018 Yellow green	RAL 6020 Chrome green

EVOLUTION

								
RAL 6029 Mint green	RAL 6033 Mint turquoise	RAL 7000 Squirrel grey	RAL 7001 Silver grey	RAL 7011 Iron grey	RAL 7012 Basalt grey	RAL 7016 Anthracite grey	RAL 7021 Black grey	RAL 7024 Graphite grey
								
RAL 7030 Stone grey	RAL 7032 Pebble grey	RAL 7035 Light grey	RAL 7040 Window grey	RAL 7042 Traffic grey	RAL 8001 Ochre brown	RAL 8004 Copper brown	RAL 8007 Fawn brown	RAL 8011 Nut brown
								
RAL 8012 Red brown	RAL 8017 Chocolate brown	RAL 8019 Grey brown	RAL 8025 Pale brown	RAL 9002 Grey white	RAL 9006 White aluminium	RAL 9007 Grey aluminium	RAL 9003 Signal white	RAL 9004 Signal black
								
RAL 9005 Jet black	RAL 9010 Pure white	RAL 9016 Traffic white	P150 Silver	P151 Gold	P152 Copper	P157 Rose Gold	P158 Brass	B199 Varnish






SATIN FINISH

		
RAL 9005 Jet black	RAL 9010 Pure white	S199 Varnish

MATT FINISH

											
RAL 1021 Sunny yellow	RAL 3020 Traffic red	RAL 5010 Gentian blue	RAL 6005 Moss green	RAL 7001 Silver grey	RAL 7016 Anthracite grey	RAL 7035 Light grey	RAL 8011 Nut brown	RAL 9004 Signal black	RAL 9005 Jet black	RAL 9010 Pure white	M199 Varnish


FLUORESCENT PAINT

				
F146 Yellow	F143 Orange	F107 Red	F118 Blue	F136 Green

TECHNICAL CHARACTERISTICS:

Spreading 520/400ml = 1 m²
 Surface drying time 5 minutes.
 Total drying time 15 minutes.
 Repainted in 15 minutes.
 Heat resistance paint:
 recommended up to 150°C.

METALLIC PAINT

					
MT155 Red	MT154 Blue	MT156 Grey	MT153 Black	MT191 Silver	MT192 Gold

TECHNICAL CHARACTERISTICS:

Spreading 520/400ml = 1,4 m²
 Surface drying time in 10 minutes.
 Total drying time in 15 minutes.
 Repainted after 5 minutes.
 Heat resistance paint:
 recommended up to 100°C.

*Do not use on devices connected to the electrical network and apply in ventilated areas.
 Once empty, the spray must be deposited in the yellow container.*





NOVASOL SPRAY S.A.

C/ Empalme, 27
43712 Llorenç del Penedès (SPAIN)
Tel. +34 977 677 305
www.pintyplus.com
novasol@novasolspray.com

