

TECHNICAL DATA SHEET

PINTYPLUS BASIC
GOLD-SILVER-COPPER PAINT



1. Description


PintyPlus BASIC Silver/Gold/Copper Paint is a quick dry acrylic enamel meant for the decoration of supports such as metal, aluminum, tinfoil, steel, etc.

2. Properties:

- Very quick dry
- Great chromatic effect
- High hiding power
- Good adherence
- Very easy application
- It does not contain neither lead or chromates.



**The information about the level of volatile substances emissions inside a room state a toxicity risk by inhalation, in a scale ranging from A+ (very light emissions) to C (strong emissions)*

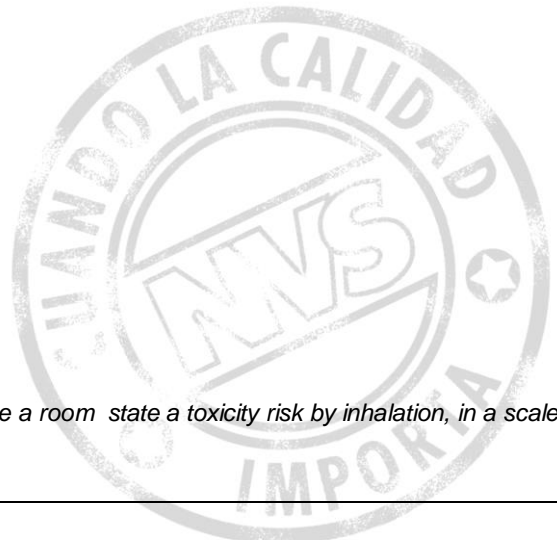

3. Recommended uses:

Very suitable for indoor uses. Recommended to protect and decorate any kind of supports: wood, metal, cardboard, ceramics and many kind of plastics. Ideal for industry, DIY, automotion, plumbing...

4. Presentation

Colours: Silver P150; Gold P151; Copper P152.
Cans: 520cc/400 ml and 270cc/200ml cans.

5. Technical Characteristics:

- Nature Thermoplastic acrylic resin
- Pigments Non organic metallic pigments

• Solvents	Ketones and aromatics
• Propellant	Hydrocarbons, rich in C3 y C4
• Density	0.88 ± 0.02 gr./cc (Depending on the colour)
• Viscosity	11 – 12 seg. (Ford Cup Nr. 4, 20°C)
• % solids in weight	14 ± 1 % (Theoretical value)
• VOC	635 gr. ± 10 gr./l (Depending on the colour)
• Gloss at 60°	Metallic
• Spreading:	520/400ml: 1,2 m ² according to support 270/200ml: 0,6 m ² according to support
• Drying time at 20°C:	Superficial: 5 minutes Total: 10 minutes Repainted : After 5 minutes
• Application temperature	from 15 up to 35°C
• Paint resistance to the heat	Recommended up to 100°C
• Flammability	Extremely flammable
• Pressure:	3-4 bars at 20°C 6-7 bars at 50°C
• Cleaning	Cleaning solvent in spray
• Life of the product	> 3 years

6. Instructions

The surface to be painted should be clean, dry and without any kind of pollutant. In order to obtain an optimal finish, treat the surface previously with a primer, sealant or any suitable anchorage layer. Shake the can well during 1 minute after hearing the ball rattles. Spray at a distance for 25/30 minutes applying thin, quick and criss-cross layers. In order to achieve a uniform finish and avoid any paint hang, it is advisable to apply two thin layers instead of a thick one. At the end of the application, turn the can over and spray until only gas comes out.

7. Security

The aerosol can features the correspondent security indications which must be followed. For further information please check the Security Data Sheet.

The information provided in the present technical sheet is the result of the research undertaken in our laboratory as well as real experiences based on applications. Nevertheless due to the fact that quite often the products are used in conditions beyond our control, we cannot warranty the good results of the product if the

application and use are not the correct ones.



NOVASOL SPRAY S.A.

Polígono Industrial Empalme
Carretera de l'Arboç a Llorenç, Km. 4,7
Tel. 977 67 76 05 Fax. 977 67 80 72
43712 LLORENÇ DEL PENEDEÈS (Tarragona)
novasol@novasolspray.com