

TECHNICAL DATA SHEET

PINTYPLUS BASIC SYNTHETIC MATT VARNISH




1. Description

BASIC synthetic matt varnish for the protection and decoration of several surfaces indoors and outdoors.

2. Properties:

- Great adherence
- Smooth satin finish
- Great transparency
- Excellent resistance to the atmospheric elements
- Great hardness and flexibility
- Very easy application

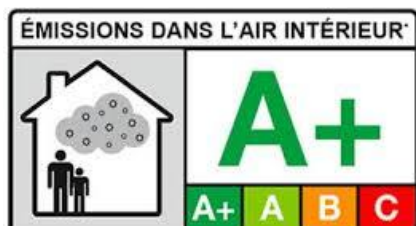

* Information sur le niveau d'émission de substances volatiles dans l'air intérieur, présentant un risque de toxicité par inhalation, sur une échelle de classe allant de A+ (très faibles émissions) à C (fortes émissions).

**The information about the level of volatile substances emissions inside a room state a toxicity risk by inhalation, in a scale ranging from A+ (very light emissions) to C (strong emissions)*

3. Recommended uses:

Suitable for use both indoors and outdoors. Recommended to project and decorate any kind of supports: metal, cardboard, stone, ceramics and many kinds of plastics. Ideal for D I Y, industry, automotion, plumbing ...

4. Presentation

Colours: Colourless M199

Cans: 270cc/200ml & 520cc/400ml

5. Technical Characteristics:

- Nature Thermoplastic alkydic resin
- Solvents Aromatics

• Propellant	Hydrocarbons, rich in C3 y C4
• Density	0.88 ± 0.01 gr./cc
• Viscosity	12 – 13 seg. (Ford Cup Nr. 4, 20°C)
• % solids in weight	23 % (Theoretical value)
• VOC	610 gr./l (Theoretical value)
• Gloss at 60°	5 - 15%
• Spreading:	270/200ml: 1 m ² according to support
•	520cc/400ml: 2m ² according to support
• Drying time at 20°C:	Superficial: 1 hour Total: 3 hours Repainted : Before 1 hour or after 48 hours
• Application temperature	from 10 up to 35°C
• Paint resistance to the heat	Recommended up to 90°C
• Flammability	Extremely flammable
• Pressure:	3-4 bars at 20°C 6-7 bars at 50°C
• Cleaning	Cleaning solvent in spray
• Life of the product	> 3 years

6. Instrucciones

The surface to be treated should be clean, dry and without any kind of pollutant. Shake the can. Spray at a distance for 25/30 minutes applying thin, quick and criss-cross layers leaving a few minutes to dry between layers. In order achieve a uniform finish and avoid any vanish hang, it is advisable to apply two thin layers instead of a thick one. At the end of the application, turn the can over and spray until only gas comes out.

7. Security

The aerosol can features the correspondent security indications which must be followed. For further information please check the Security Data Sheet.

The information provided in the present technical sheet is the result of the research undertaken in our laboratory as well as real experiences based on applications. Nevertheless due to the fact that quite often the products are used in conditions beyond our control, we cannot warranty the good results of the product if the application and use are not the correct ones.



NOVASOL SPRAY S. A.

Polígono Industrial Empalme
C/ Empalme, 27
Tel. 977 67 76 05 Fax. 977 67 80 72
43712 LLORENÇ DEL PENEDÈS (Tarragona)
novasol@novasolspray.com